

LCG
SYSTEM

By LC CORP



Owner's manual

Model: L-250

Owner's manual

Table of Contents

| | |
|--|----|
| Inspection of the LCG - model L-250 | 3 |
| Introduction | 4 |
| Specification | 5 |
| Identifying the parts | 6 |
| Spa Installation Instruction Fiber Glass arm assembly | 7 |
| Safety Instruction | 8 |
| Health risk warning | 9 |
| Operation & use Adjust footrest | 10 |
| Cleaning & Maintenance | 11 |
| Warranty & Service | 12 |

Introduction

LCG Spa would like to thank you for your purchase of L-250. With impressive design and highly quality control production, L-250 of LCG Spa surpasses industry standard for performance and comfort.

With LCG L-250, you can be assured of uncompromised cleaning standard with safe pipeless technology; Pipeless jet features a convenient, removable screen plate to allow easy cleaning. You will be pleased with our world-class massage chair, a full function of kneading, tapping, rolling system that provide your clients most relaxing moment. All parts in L-250 are made at highest safety standard.

With minimal maintenance and care, your LCG L-250 will give you years of carefree service.

Specifications:

| | |
|-------------------------------|------------------------------|
| . Dimension: (with seat back) | 56" L x 29" W x 53" H |
| . Net weight: | 60 kgs |
| . Shipping weight: | |
| . Capacity of tub: | 7 US gallon |
| . Spa Base: | Fiber glass with steel frame |
| . Power source: | 120V AC/ 15 Amp 60 Hz |



Identifying the part.



1. Chair with massage system
2. Hand shower
3. Water spout
4. On/Off Air Switch
5. Massage & recline control
6. Hot & Cold mixing valve

7. Adjustable footrest
8. Air control
9. LED light
10. Drain plug
11. Drain control Knob
12. Jet motor

Spa Installation Instruction:

Electrical Service

An 110 V, 60 Hz, 15 Amp GFCI protected grounded circuit must be used to supply power to the LCG L-250. The Service must performed by qualified licensed electrician.

Water Supply

All plumbing connections must conform to local codes.

Hot water supply temperature

The hot water supply temperature must not exceed 150 degree F (65 degree C).
Adjust your hot water heater accordingly.

Hot and Cold water supply lines

Carefully connect the coming water Supply lines to the appropriate hose located on the back of the LCG L-250. Shut Off valves are recommended.

Massage chair assembly: *(See details in chair user's manual)*



Drain line Installation:

Warning

The Spa must be installed by a qualified, licensed plumber.
Failure to comply may result in serious injuries and
Warranty will be voided.

- **Gravity drain:**
LCG L-250 uses a standard gravity drain. A floor drain is the recommended installation
P-Trap is supplied.
- **Discharge pump:** (Optional)
Discharge pump is installed by manufacturer

Safety instruction

Caution: Basic precaution should always be observed, including the followings:

Those with the following conditions should consult their physician prior to using this product.

- A - Phalignant tumor
 - B - Heart disease
 - C - Conditions requiring rest
 - D - Conditions requiring rest
 - E - Back disease or back trouble from injury an accident.
- Always enter and exit pedicure spa slowly and carefully.
 - Do not permit children to use this unit unless they are supervised at all time.
 - Do not use outdoors
 - Do not use this unit if noise above normal sound is heard.
 - Make sure all operation switches are is OFF position before connecting the power cord to an electrical outlet.

Health risk warning

Individuals whose feet or legs are inflamed or have open wounds should not be allowed to use the pedicure spa at any time. Nail technicians should advise clients to consult their physician before using the pedicure spa if there is any sign of fungal infection, swelling, fracture, or persistent pain. In some cases diabetics may experience improved circulation in their feet, but should first consult their physician prior to receiving a pedicure if the client's massage and pedicure spa experience should be pleasant and comfortable.

Warning

Grounding instructions and methods:

We strongly recommend that all outlets connected to pedicure spas to include a GFCI device (Ground Fault Circuit Interrupters) This will reduce the risk of electric shock.

This product must be grounded. If it should malfunction or break down, grounding provides a path of least resistance for electrical current to reduce the risk of electric shock.

Operation and use

1 - Fill Sink:

Your LCG L-250 is provided with a single hot and cold mixing valve, located on the Front Center of the Spa. This is a pressure balance valve that requires you to lift the handle to start the water flow and turn the valve to the temperature level desired. Fill water to completely submerge the jet motor.

2 - Start

Press ON / OFF power button, located next to the footrest, to turn jet motor and Spa light. To stop the whirlpool function, press the button again.

3 - Adjust air control


The air control button is situated on the Spa base, just under the chair. You can control the supply of air to the jet motor by turning this chrome button in a clockwise direction.

4 - Hand shower

The LCG is equipped with a handheld sprayer, located under the footrest. To activate the hand shower pull the hand shower, lift handle of hot and cold mixing valve and depress the thumb control on the sprayer handle.

5 - Adjust footrest

LCG allows you to adjust the height of the footrest by lifting its front end up. To have the footrest back to normal position, push the footrest side way and press down (see picture below).

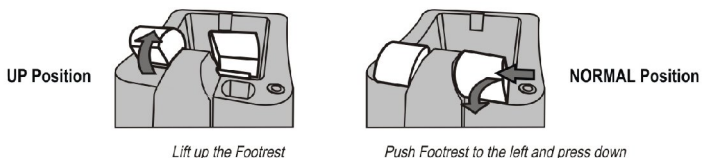

6 - Drain whirlpool sink

A - Gravity Drain

Open the drain plug by turning the control knob which is situated at the far right of Spa base.

B - Discharge pump (Optional)

Open the drain plug by turning the control knob. Press discharge pump button, located on front side of spa base.

7 - Massage chair

Please see chair Use's Manual for operation and use of the chair

Cleaning & Maintenance

LCG highly recommends the following cleaning regimen. **You should always contact your local governing agency for their specific cleaning and disinfecting requirements and regulations for pedicure spas.** For your clients safety, always use the regulations as a minimum standard for cleaning and disinfecting. Combining your states standards with the regimen listed below will provide your clients with a safe and healthy pedicure spa environment experience.

Routine maintenance.

Perform cleaning procedure each use.

Powered cleansers or abrasives are NOT RECOMMENDED.

A clean towel or sponge, are all that are usually needed. A soft bristled brush may be used when excessive residue is present. Use disinfectant with EPA approved and clean entire spa basin, remove the Jet motor's cap to spray disinfectant. Rinse Spa basin with clean water and drain out.

LCG recommends 3 in 1 spa disinfectant (EPA approved) a product of Cali Chem (*see insert*).

Use a mild soap and water solution to clean the upholstery, but do not over wet. Wipe dry with a clean towel. No internal maintenance of the spa components is necessary.

For extra protection, our recommendation is that the system be flushed daily or weekly depending on use. To flush the clean jet system fill spa with hot water to just above the jets. Add disinfectant. Run whirlpool for 10 minutes, drain and then wipe dry with clean soft cloth.

NOTE:

Cleaning or sanitizing is NOT disinfecting. According to the Centers for Disease Control and Prevention (CDC), and the US Environmental Protection Agency (EPA), disinfecting occurs only when there is a reduction of pathogenic microbes at 99.000%. Sanitizing is only a reduction of 99.9%. Cleaning of whirlpool pedicure spas requires surfactants and chelating detergents that are low-foaming and have the ability to remove body oils, organic oil additives, mineral oil, skin cells, nail clippings etc that can accumulate both in the basin and the jets which may become a fertile area for micro organisms grow.

The use of oil based products can build up in the whirlpool system causing clogging in the jets. Adherence to the above cleaning will minimize build up. LCG does not recommend the use of mineral oil based products.

Warranty & Service

Purchasers MUST mail in Registration Form in order to have the warranty to be effective.

LCG warrants to the original purchaser that the new pedicure spa will be free defect during the Standard Warranty Period (listed below). The shipping date and the uniquely-coded Serial Number on the back of each spa will justify the start of the warranty period for the product. The warranty is null and void if the pedicure spa is taken from its initial place of installation, or it is not installed in accordance with federal, state or local codes and ordinances. Also, this warranty does not apply if the pedicure spa has been subject to misapplication, improper installation or maintenance, negligence, improper cleaning or other circumstances beyond LCG's control.

Warranty

1. Limited Three Year warranty on Spa Shell.
2. Limited One Year warranty on the Jet motor.
3. Limited One Year Parts-Only warranty which covers the Hydraulic System, Discharge Pump, Massage System and All Electrical Components.
4. LCG will pay shipping charges on all replacement parts during the first 90 Days of the Warranty Period. After 90 days, the consumer is responsible for all labour and shipping costs incurred.

Exclusions

1. Damage to pump parts and/ or motor parts due to obstruction in plumbing lines etc.
2. Staining, fading or discoloration of fiber glass surfaces due to exposure and / or the use of harmful cleaning agents or chemicals.
3. Staining, fading or discoloration caused by improper or poor water additives not related to the maintenance of proper water are not covered by this warranty.
4. Staining, fading or discoloration of the seat, armrests or footrests.
5. Freight damage without stating on BOL, misuse, neglect, unauthorized repairs, accident, natural disaster and unreasonable use.

Service

1. The Dealer shall forward all warranty-related matters to our Customer Service Department.
2. Serial Number and Original Invoice must accompany all warranty claims.
3. Customers are responsible for shipping defective parts back to LCG. These parts must be packaged correctly in order to protect against any further damage.
4. All parts are to be shipped by UPS Ground Service - average 2-5 days.
5. All defective parts must be shipped back to LCG within 30 days of receiving the new replacement parts or warranty will be void.
6. Any warranty claim that cannot be done if you did not mail in Registration form .
7. Any service performed on the product without LCG authorization will also void the Warranty.
8. Each service call from the customer will be assigned a Claim Number. The Claim Number will stay open until the problem is resolved.

No dealer or other person has any authority to bind LCG to charges or additions to this warranty or its products. Accordingly, LCG is not responsible for such warranties of representations.