
PEDICURE SPA

OWNER'S MANUAL



**IT IS IMPORTANT THAT YOU READ AND FOLLOW THESE INSTRUCTIONS.
PLEASE KEEP THIS MANUAL IN A SAFE PLACE.**



IMPORTANT!

BEFORE USING THE SPA PLEASE READ AND FOLLOW INSTRUCTIONS CAREFULLY.

Please keep this manual in a safe place.

Important Safety Instructions

When using this unit, make sure to follow basic safety measures, including the following:

Warning!

To reduce the risk of burns, fire, electrical shock, or other bodily harm:

This unit should only be plugged into a circuit protected by a ground fault circuit interrupter (GFCI). Test the GFCI periodically per manufacturer's instructions.

The plug of this item can only be connected to a suitably grounded socket. Please refer to grounding instructions. The plug should be completely inserted and accessible after installation.

Please unplug the chair if not in use.

If the supplied cord is damaged, it must be replaced by the manufacturer or an authorized service representative to avoid damage or injury.

Please do not stand on the inside of the basin or on the spa

Please keep this item safely away from heat sources, humidity, sharp objects, corrosive chemicals, and flammable objects.

If the chair becomes damaged, splashed with or dropped into water, or fails to operate for any other reason, please contact the dealer and send it to an authorized service center for repairs.

This item is for indoor use only.

To avoid risk electric shock or bodily harm please do not open or disassemble any part of this item.

Pregnant women, people of poor health and those who feel pain in their neck, back, waist, or hip should consult doctors before use. People with pacemakers or other personal medical devices should consult manufacturer of the device and doctors before use.

Disabled people or those who cannot express themselves must be strictly and continuously supervised while using this chair.

Please do not allow small children to use or play around the chair.

Do not use if you are diabetic, have poor circulation, or if any area of your feet or legs are inflamed or have open wounds. Consult a physician before using if you have any kind of fungal infection, swelling, fracture, or persistent pain.

Receipt & Inspection

Thoroughly inspect each shipment immediately upon arrival. It is important that you notify the delivery driver of any damage and insist on a notation directly on the face of the freight bill. Failure to note damage on the face of the freight bill may impede and/or prevent any claims that you may have against the carrier.

If concealed loss or damage is found, you must notify the carrier at once and request an inspection. **DO NOT DISCARD THE SHIPPING CARTON.** If you give the carrier a clear receipt for goods that have been damaged in transit, you do so at your own risk and expense.

Parts Included:

- 1 - Pedicure Spa Unit
- 1 - Owner's Manual
- 1 - Sprayer Head
- 1 - Drain Plug
- 1 - P Trap
- 1 - Faucet Handle

Grounding Instruction

To reduce the risk of electric shock, proper grounding is required for the chair. This item is equipped with a grounded plug; insert the grounded plug into a grounded socket with proper installation and suitable local voltage.



Dangerous!

Incorrect grounding may cause electrical shock. If you have any questions about this item, please consult a licensed electrician. If the plug sent along with the chair does not match your socket, please do not modify the socket. Ask technicians to install a suitable one. Modification from the original manufactured specifications will void all warranties expressed or implied. Please do not use a plug adapter.

Changing the Fuse

In cases of an electrical shortage the fuse may burn out. The user can open the fuse cap with a screw driver and replace it with an appropriate fuse and put the fuse cap back on. If there are any questions please consult a licensed electrician.

Important Precautions

AYC Group requires that you contact a local, qualified plumber to install your new AYC Group pedicure spa. It cannot operate properly or safely unless it is provided with adequate electrical power, sufficient water pressure, proper water temperature and the required drain facilities. Information on these important subjects is contained in this manual. We urge you to read it carefully to make sure these requirements are met.

1. Excessive water temperature is dangerous and should be checked before use. Maximum operating water temperature should not exceed 100 F° (38 C°) and the maximum supply water temperature should not exceed 125 F° (65 C°).
2. Always enter and exit the pedicure spa slowly and carefully.
3. Never bring and/or operate any electrical devices into or near the spa.
4. Do not stand in the whirlpool tub!


Installation Summary

The installation must comply with all plumbing and electrical codes. A licensed plumber should complete the plumbing of the spa.

Note: Failure to comply with federal, state or local codes and ordinances will result in warranty being null and void.

Select a level location where the floor structure beneath the spa is capable of supporting the occupied spa.

For the seat back to fully recline, the spa base must be placed a minimum of 20 inches from the wall.

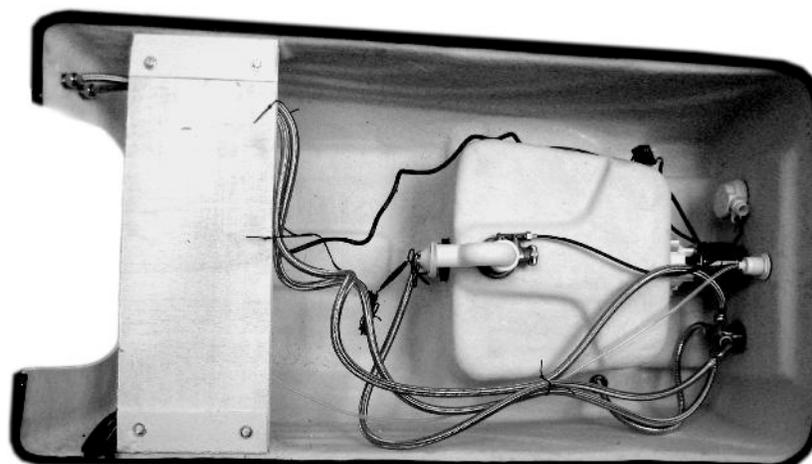

Drain and Water inputs

Connect the water supply lines with cold and hot inputs.

Connection: Cold ½ NPT
Hot ½ NPT

Attach the P-trap to the bottom of the drain with the retaining nut. Be sure to place the gasket between the brass drain and the P-trap.

Connect the floor drain connection to the P-trap (if you are using a wall drain you will need to install an optional discharge pump).

Connection: P-trap 1½-inch drain pipe

Place the drain plug into the drain from the top of the drain (the drain plug may need to be adjusted so that the drain plug forms a tight seal around the drain).


Install the faucet handle by inserting it into the faucet in front with the red and blue indicator facing up. Then, tighten the lock screw with a small flathead screwdriver.

Attach the sprayer to the sprayer hose (be sure to cut the zip tie around the sprayer hose).

Plug the power cord into a GFCI outlet.

Operating the Pedicure Spa

After the spa has been installed and the plumbing and electrical connections have been made, clean the tub with AYC Group spray and wipe dry with a clean towel. Follow these instructions to test the pedicure spa:

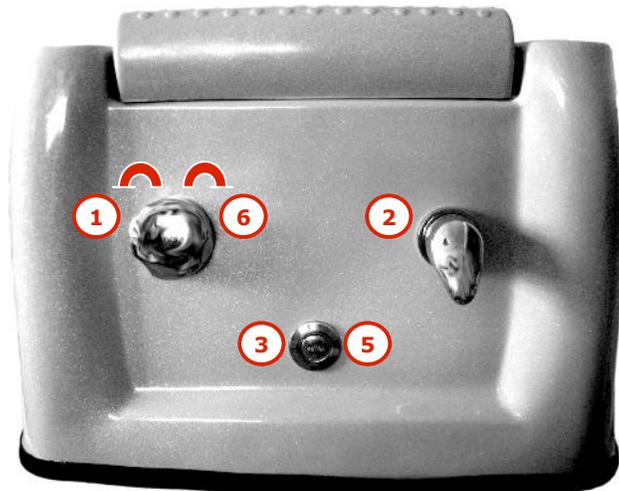

Drain lever, On/Off, Faucet lever

1. Turn the "drain handle" counter-clockwise to close the drain.
2. Fill the tub to the "water fill line" using warm water by lifting the lever upward.
3. Turn the "on/off switch" to the "on" position. This will turn the whirlpool pump on.
4. Check for leaks underneath the spa.
5. Push the "whirlpool on/off switch" to the "off" position. This will turn the whirlpool pump off.
6. Turn the "drain handle" clockwise to open the drain.

Note: If the discharge pump is not used, the water will drain out automatically; otherwise follow steps 7 & 8 to complete the water draining.

Cleaning and Disinfecting the Whirlpool Spa

Please follow these instructions to clean and disinfect the spa:

Between Each Customer

1. Drain all water and remove debris from the spa.
2. Clean the spa with soap or detergent and water.
3. Spray the surfaces and walls of the spa with the sprayer.
4. Wipe the spa dry with a clean towel.

Daily Flushing of the Whirlpool System

The spa must be thoroughly cleaned after the last pedicure of the day in the following manner:

1. Remove the suction cover with a screwdriver and turn the jet cover counter-clockwise to take it out.
2. All debris trapped behind the screen needs to be removed.
3. The inlet behind the screen needs to be cleaned with soap or detergent and water.
4. Before replacing the screen, clean it with a chlorine bleach solution of 1 teaspoon of 5% chlorine bleach to 1 gallon of water.
5. Totally clean suction cover, jet cover and interior.
6. Replace the jet cover and suction cover. Do not over-tighten the mounting screw.
7. Do not run the spa whirlpool jet without the jet cover and suction fitting cover in place.
8. Fill the tub basin with about 5 gallons of water.
9. Turn the whirlpool jet on.
10. Add 3 teaspoons of low-foaming dishwasher detergent and 2 ounces of bleach to the tub basin.
11. Run whirlpool for 10-15 minutes and drain the tub basin.
12. Clean the exterior of the foot spa with a soft cloth and mild detergent.

Biweekly Cleaning of the Whirlpool System

In addition to the daily cleaning, the follow cleaning procedures must be performed every other week:

1. Fill the basin with 5 gallons of water.
2. Turn the whirlpool jet on.
3. Add 3 teaspoons of low-foaming dishwasher detergent and 2 ounces of bleach to the tub basin.
4. Run whirlpool for 10-15 minutes. Let the water sit overnight in the tub (6-10 hours).
5. Run the whirlpool jet for 5 minutes and drain the tub basin.
6. Follow the instructions in "Daily Flushing of the Whirlpool System."

Cleaning and Disinfecting Records

A record must be made of the date and time of each cleaning and disinfecting as required by the above procedures, indicating whether the cleaning was "daily" or "bi-weekly". This record should be made available when requested by customer or inspector.

Environment for Chair Operation

1. Please do not operate this item in damp areas (such as a bathroom) to prevent electrical shock or other accidents.
2. Please place this item only on a flat surface.
3. Please make sure to leave 16 in. of space behind the chair, so that there is sufficient room to recline the backrest.
4. Do not operate this item in direct sunlight or in a place with high temperatures. Exposure could fade or harden leather.
5. This item may cause abrasion to the floor. We recommend that a floor mat or carpet be placed under the chair in order to minimize abrasions and also to reduce noise from the chair.

Specifications

Model # LS-5000B (LS-510L-209-3803VA BG)

Tub:

Color #

Water Pump: Pipeless Jet System

Air Button: AB-003

Overflow: M-003 1-1/2" Drain pipe.

Faucet: L001-2

Sprayer: B-005

Stand: D-003

Water Spout: K-001

Light: LT-001

Footrest: G-003

Serial No:

Warranty

AYC Group manufactures pedicure spas with the highest standards for quality materials and workmanship. Accordingly, AYC Group warrants its products as follows:

To the original owner of the AYC Group pedicure spas, AYC Group may repair or replace, at its option, any pedicure spa deemed to be defective in material or workmanship upon inspection by an authorized representative of AYC Group. This warranty covers only the listed components for the following time periods:

- Recirculation pump: One (1) year from date of shipment
- All other components: One (1) year from date of shipment
- There are no other warranties, express or implied.

Owner is responsible for all labor and shipping charges necessary to replace or repair the pedicure spa. AYC Group will not be liable for any consequential, incidental, or contingent damages. If a pedicure spa needs to be exchanged, it will be limited to supplying a replacement pedicure spa of comparable style and size.

AYC Group may at its own discretion use refurbished parts or pedicure spas for repair and replacement purposes. This warranty is null and void if the pedicure spa is removed from its place of initial installation or is not installed in accordance with federal, state, or local codes and ordinances. Furthermore, this warranty does not apply if the pedicure spa has been subject to misapplication, misuse, improper installation or maintenance, negligence, improper cleaning, or other circumstances beyond AYC Group's control.

The following are examples of what is not covered by the warranty:

1. Natural wear and tear.
2. Staining, fading, or discoloration of the vinyl seat, armrests, or footrest.
3. Damage resulting from standing in the basin.
4. Damage to pump parts and/or motor parts due to obstruction in plumbing lines, drains, etc.
5. Staining, fading, or discoloration of plastic surfaces due to exposure and/or the use of harmful cleaning agents or chemicals.
6. Staining, fading, or discoloration caused by improper or poor water additives not related to maintenance of proper water.
7. Malfunctions or damage caused by improper installation, including not meeting local and state plumbing, electrical, and building codes.
8. Freight damage, misuse, neglect, abuse, and natural disaster.
9. Unauthorized repairs.