


Marvel II

7853


INSTRUCTION MANUAL

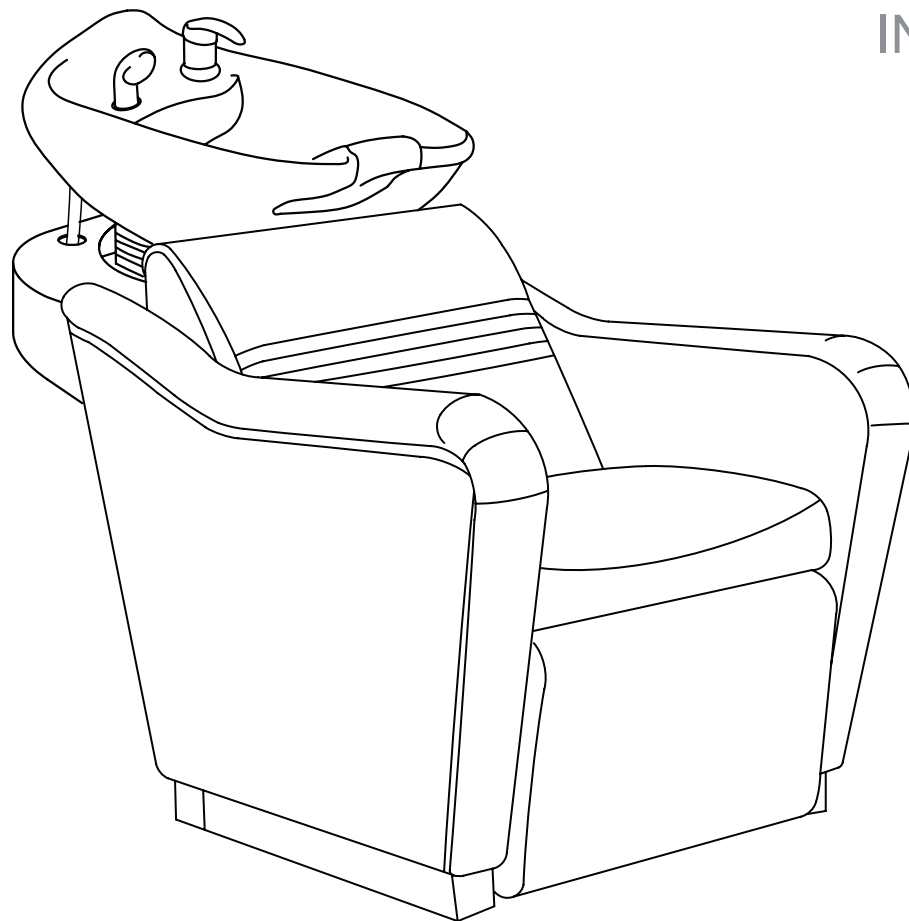

EN


ASSEMBLY INSTRUCTIONS

List of Parts

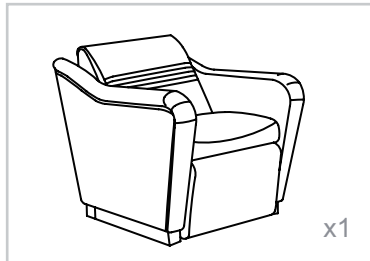


Base

x1

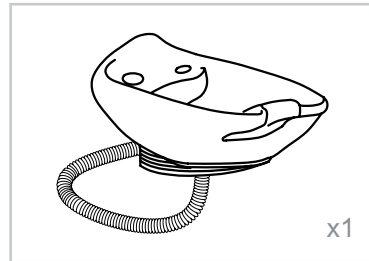


Sink + Drain Pipe
 $\phi = 3.2\text{cm} * 100\text{cm}$

x1

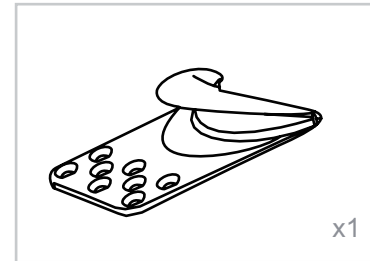


Neck Rest

x1

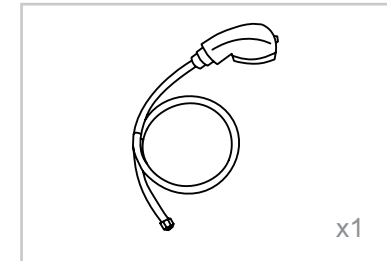


Sprayer Head
 $\phi = 1/2$

x1

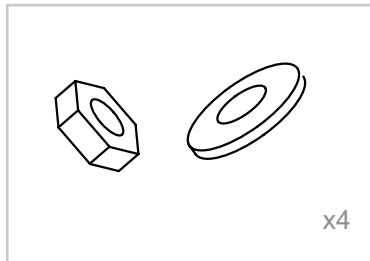


Washer & Gasket

x4

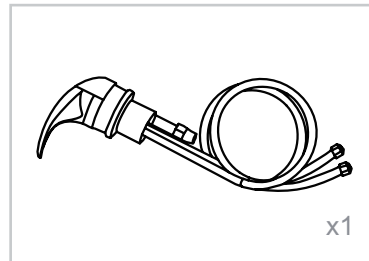


Faucet +
Red Hot Water Pipe ($\phi = 1/2$)+
Blue Cold Water Pipe ($\phi = 1/2$)

x1

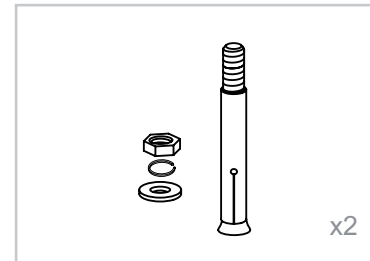


Floor Anchor

x2

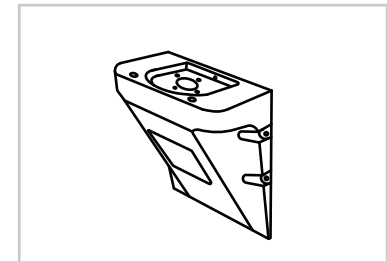

Frame

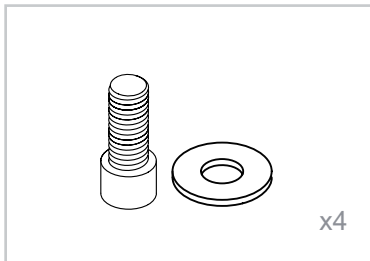


Washer & Gasket



x4

ASSEMBLY INSTRUCTIONS

Please leave minimum 20cm of space measuring from finished wall to the back of the sink to allow sink's tilting position.

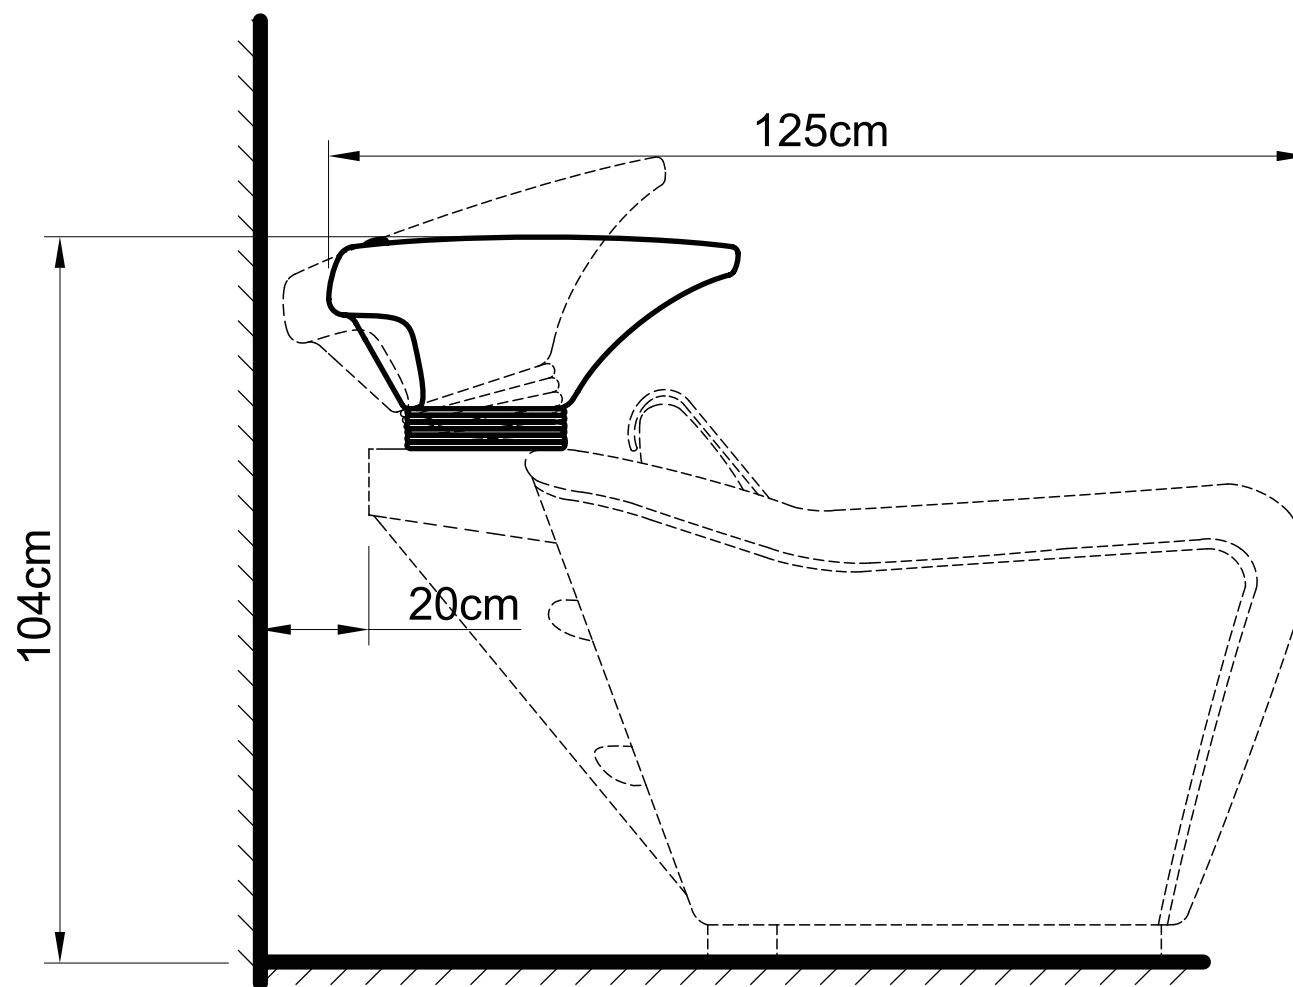


ASSEMBLY INSTRUCTIONS

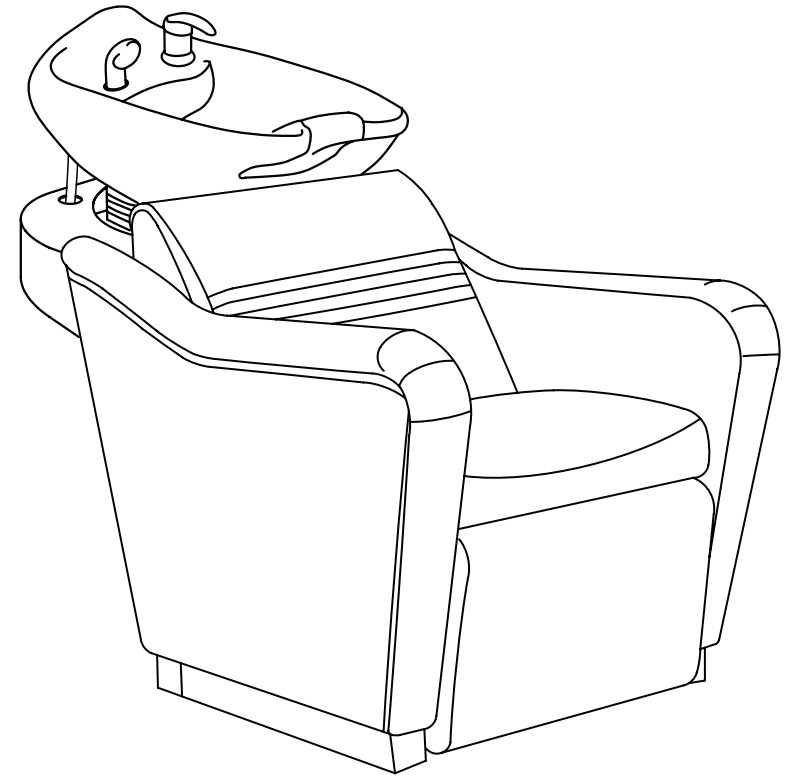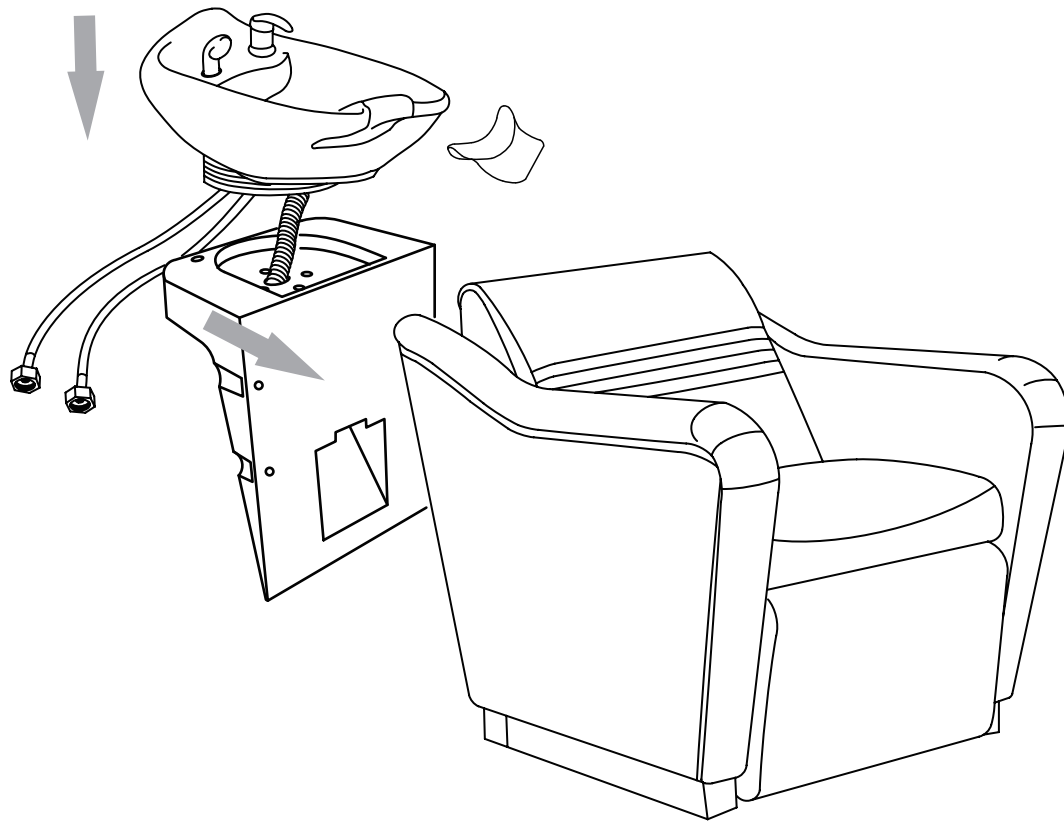


ASSEMBLY INSTRUCTIONS

Tools Necessary

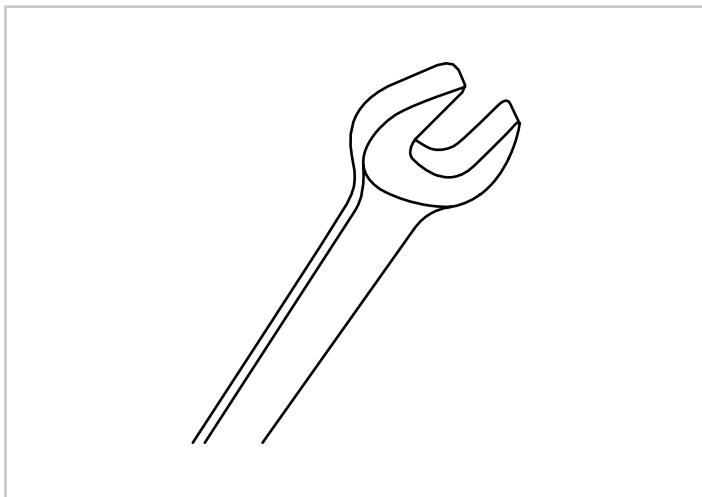


14mm Spanner (included)

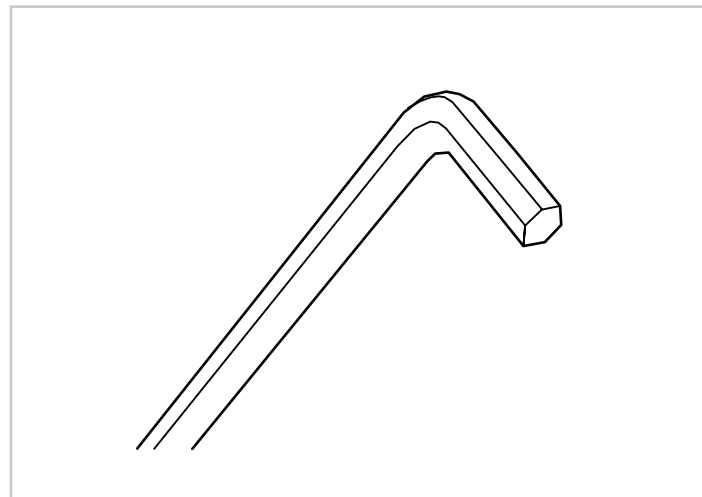



6mm Allen Key (included)

ASSEMBLY INSTRUCTIONS



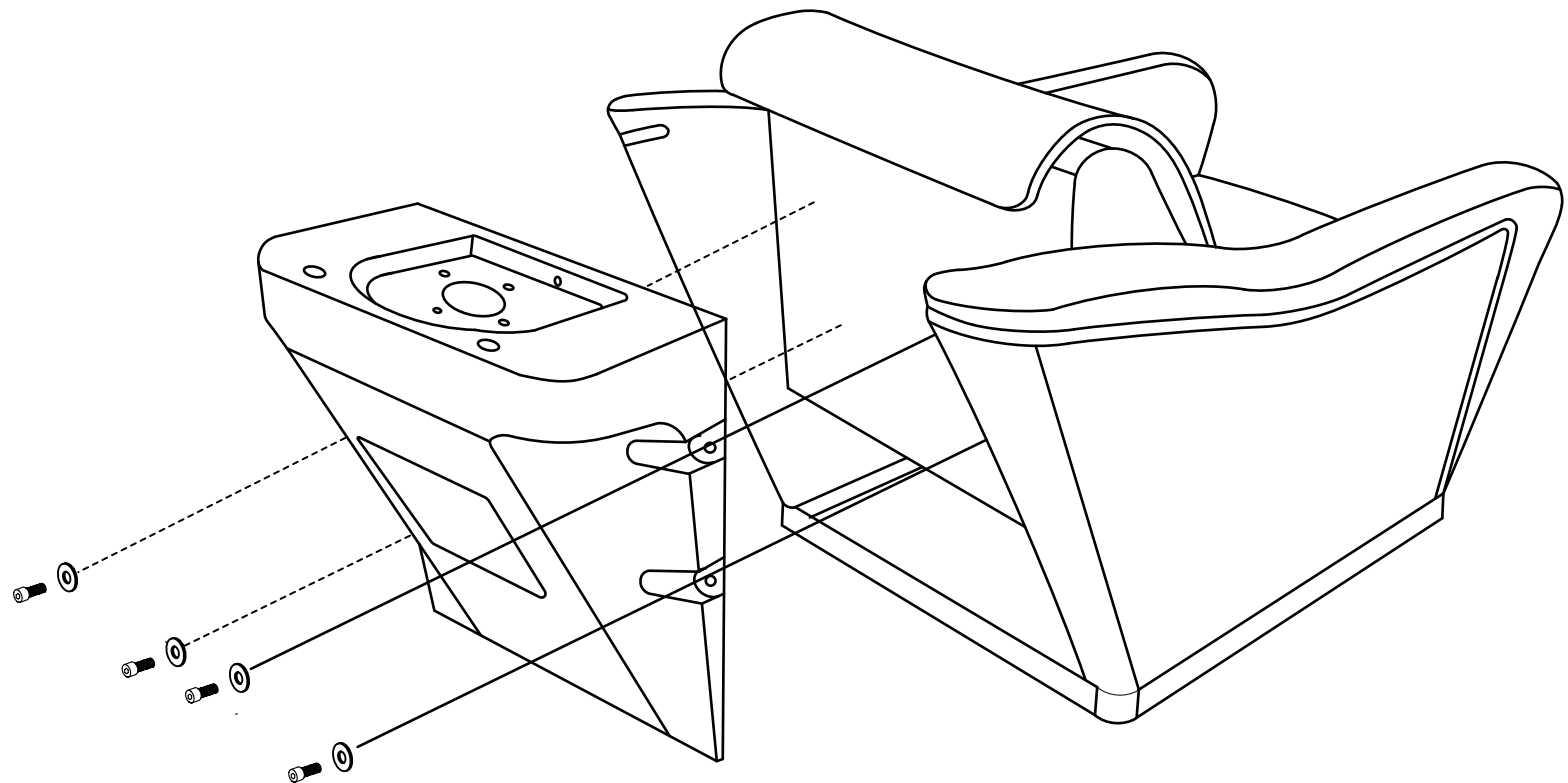


ASSEMBLY INSTRUCTIONS

Sink Assembly Instruction

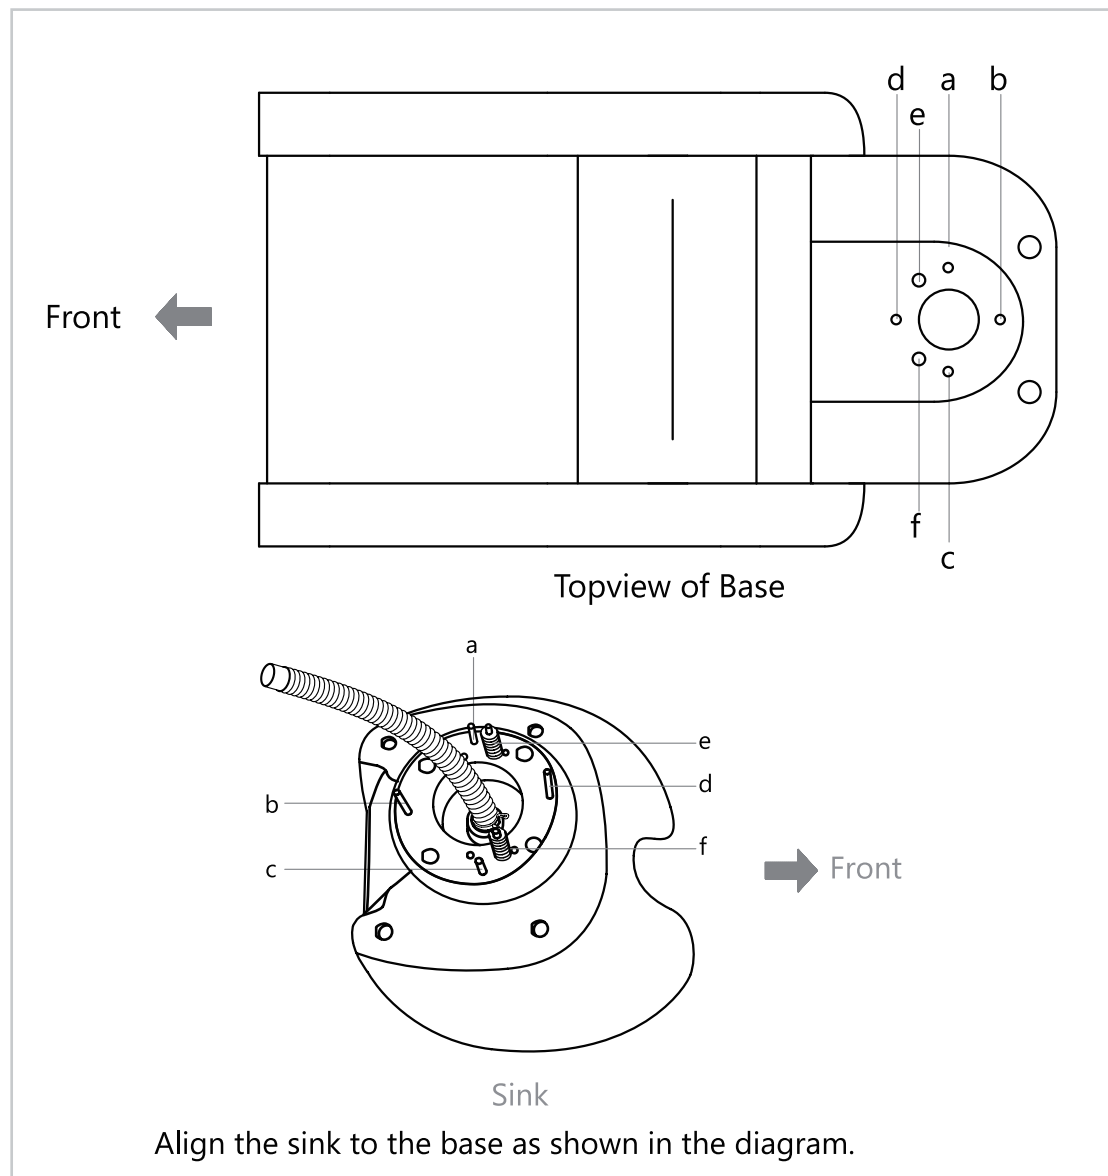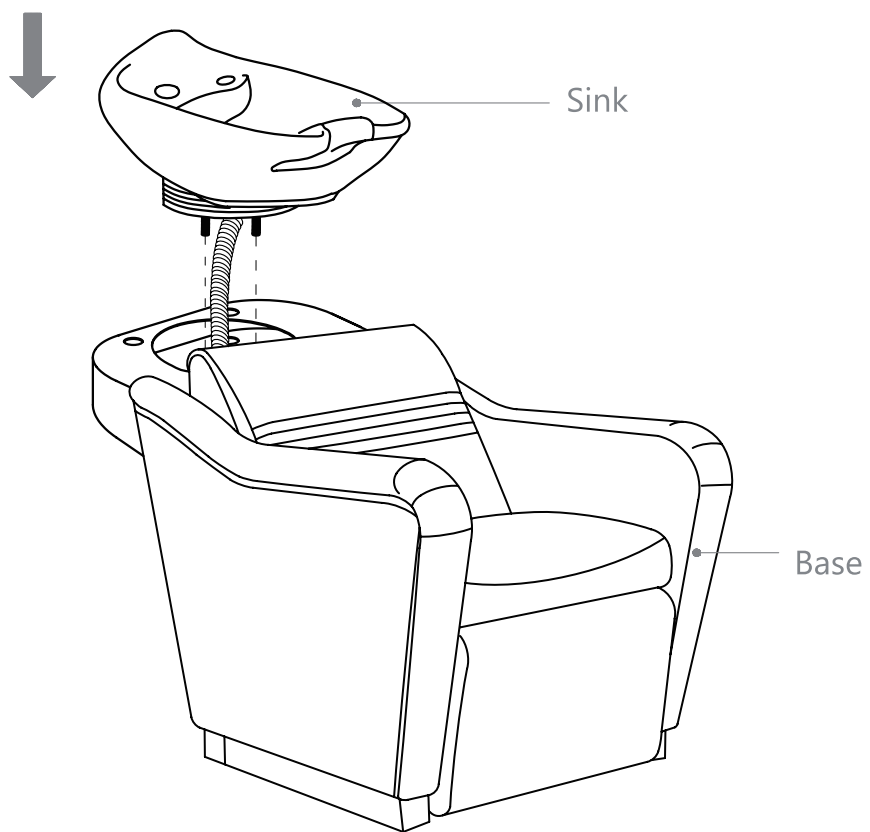


ASSEMBLY INSTRUCTIONS

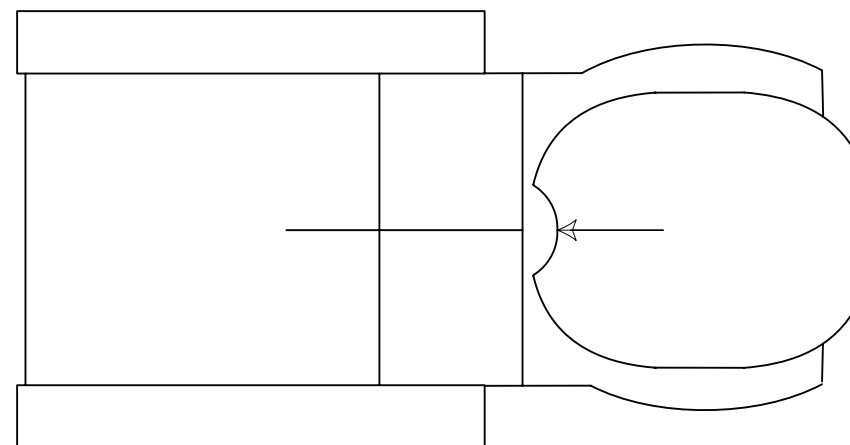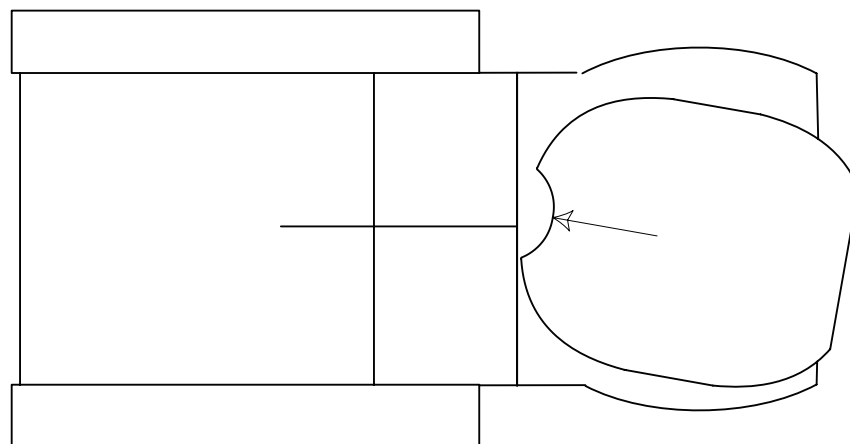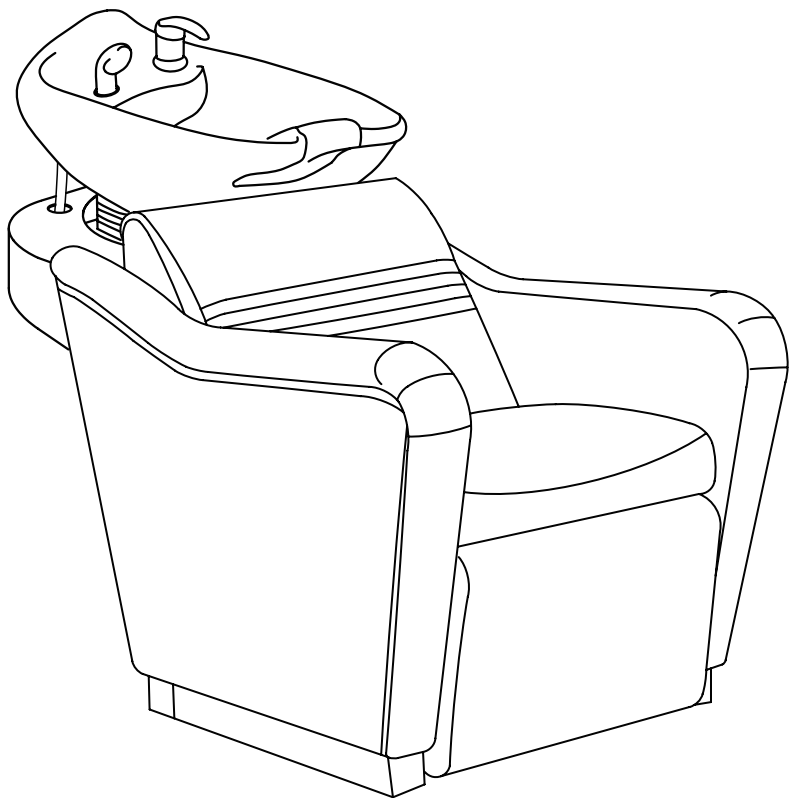

ASSEMBLY INSTRUCTIONS



Sink Assembly Instruction

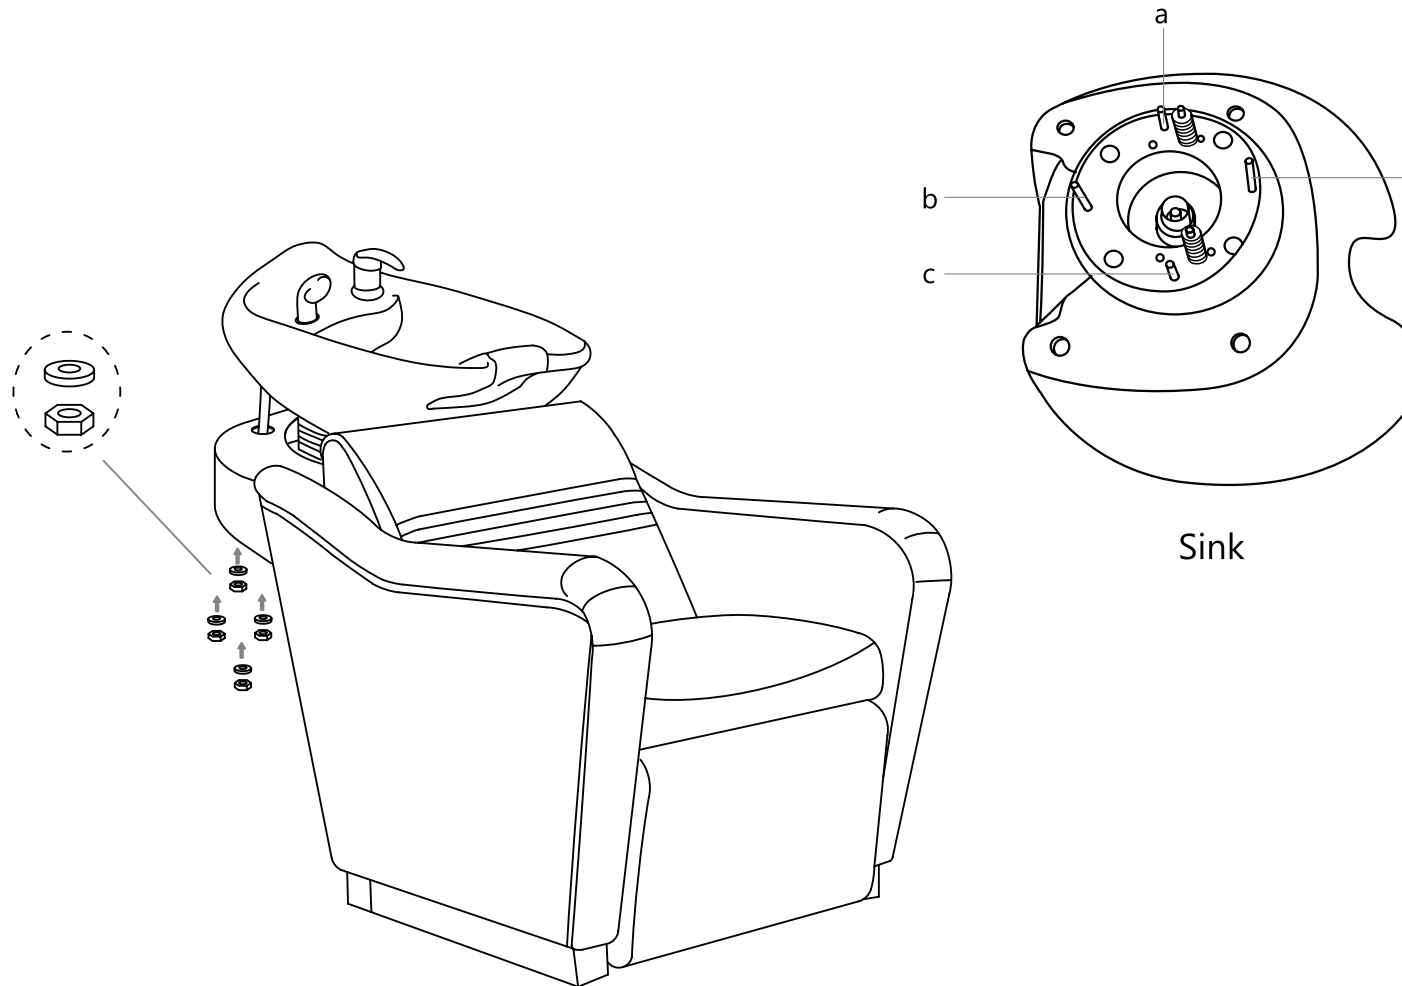


Undo the access panel by twisting clockwise then using the 4* 14 mm washers & gaskets provided fasten the sink to the base.

ASSEMBLY INSTRUCTION

Faucet Assembly Instruction

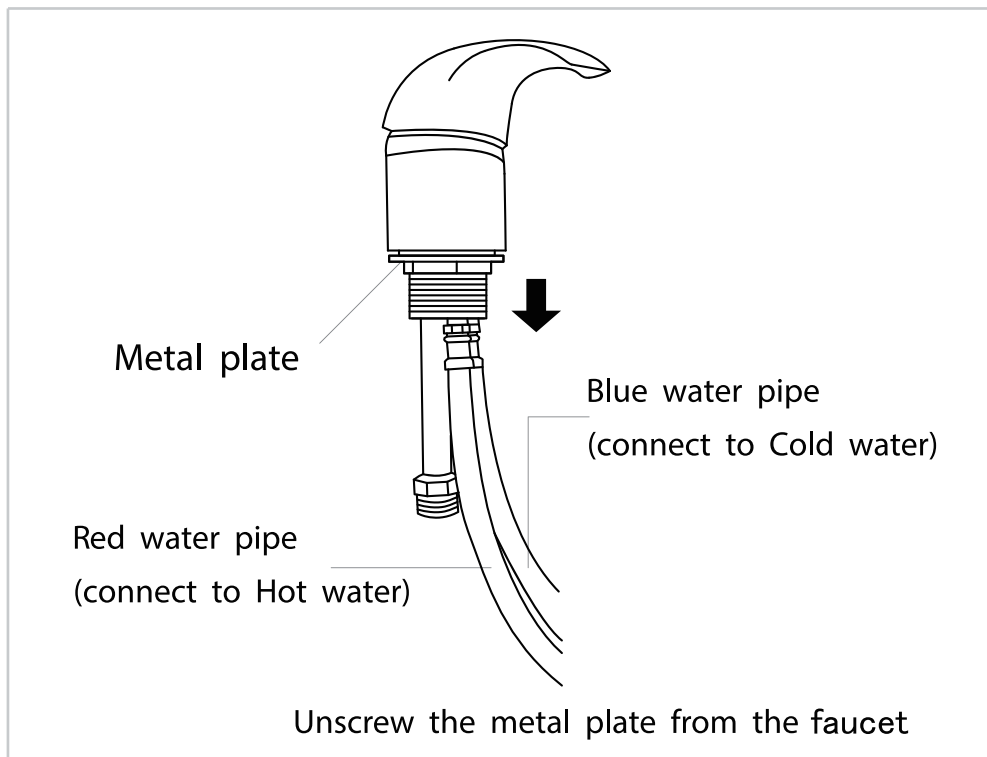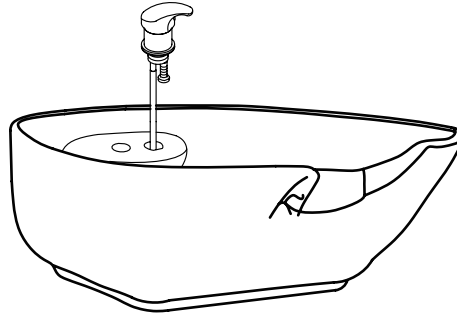



STEP 1

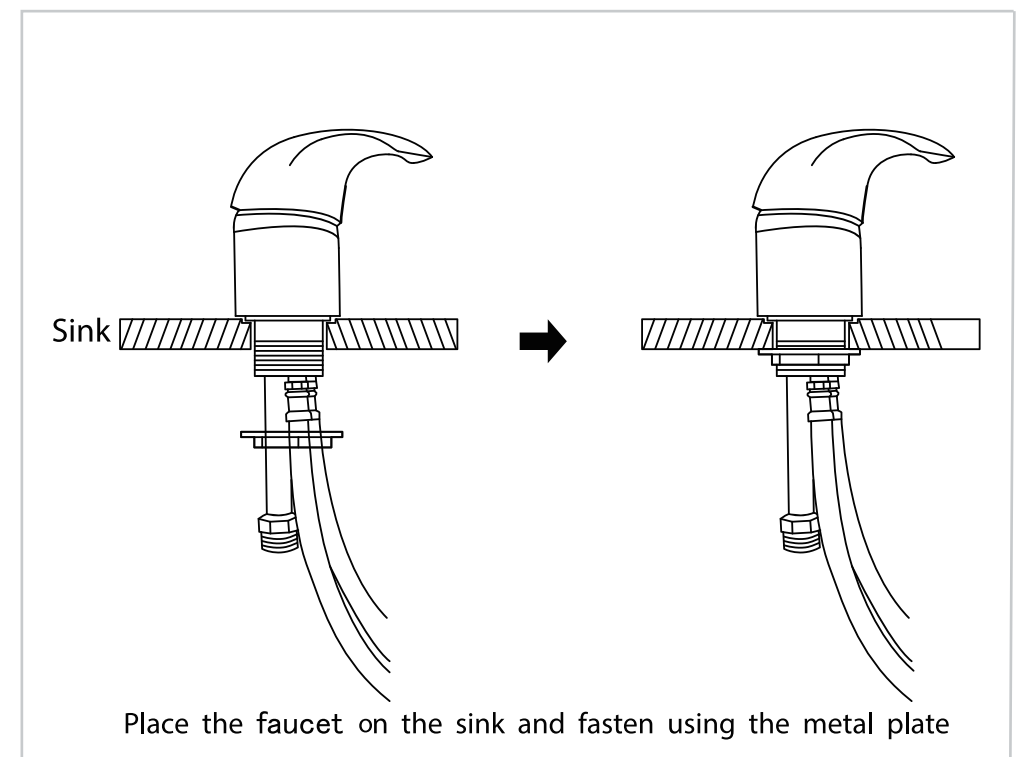

STEP 2

ASSEMBLY INSTRUCTIONS



Sprayerhead Assembly Instruction

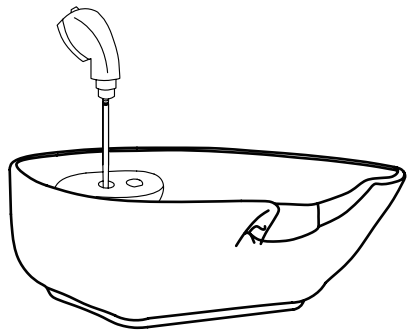

Plastic Fastener


Unscrew the fastener from the sprayerhead holder.

STEP 1





Fasten the sprayerhead holder to the sink with the plastic fastener.

STEP 2

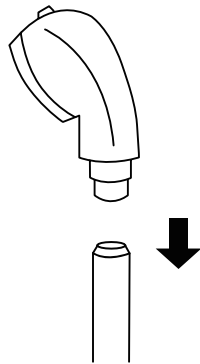

Unscrew the sprayerhead from the sprayer hose.


STEP 3

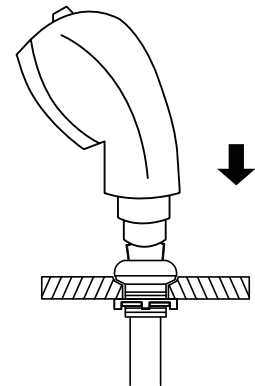


Place the sprayer hose from underneath through the sprayerhead holder and fasten the sprayerhead to the sprayer hose.

STEP 4

ASSEMBLY INSTRUCTIONS

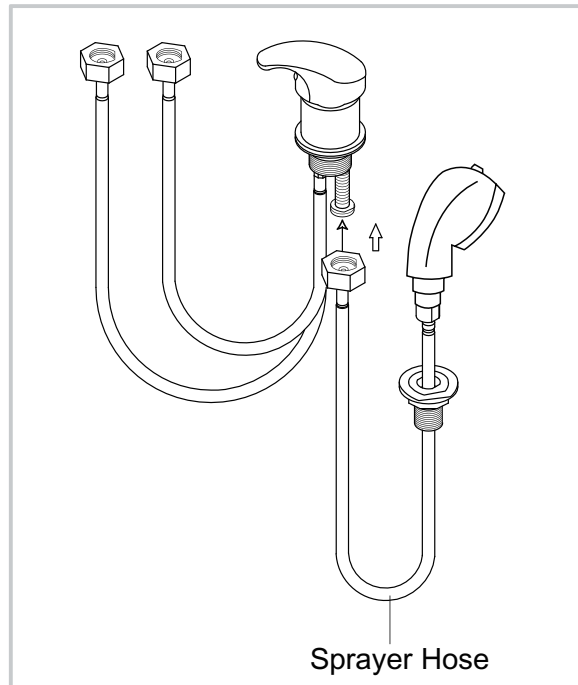


Connect to sprayer hose to the tap
shown in the diagram.

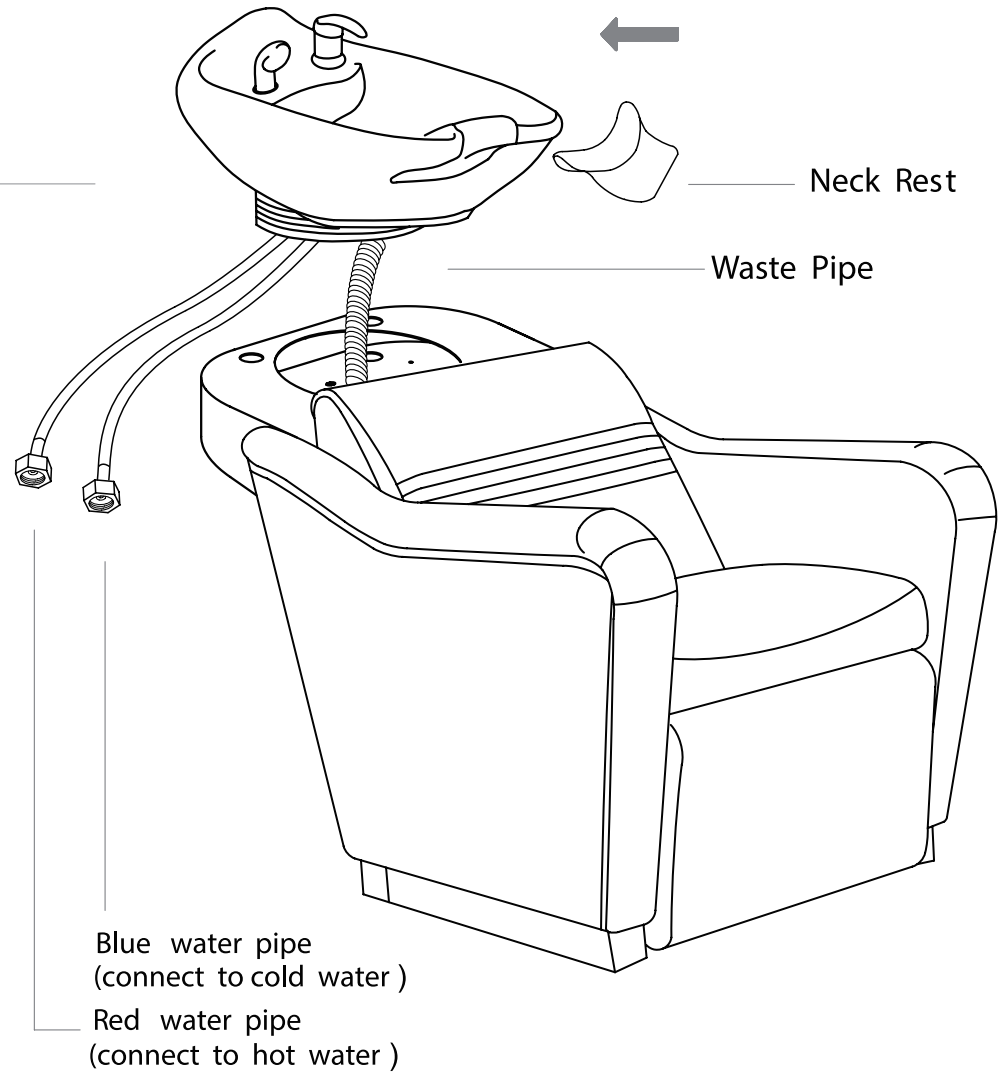

PLUMBING INSTRUCTIONS

Plumbing setup:


*removable back panel to route both water supply lines and make all connections.

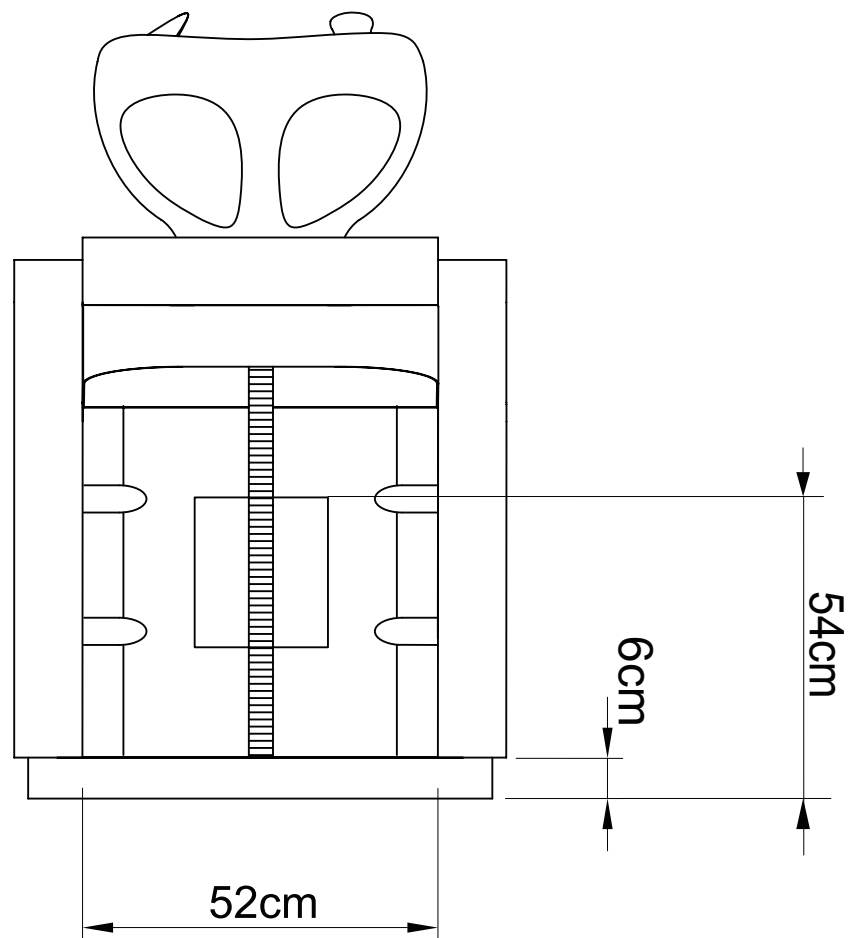

PLUMBING INSTRUCTIONS

Wall Plumbing

Wall plumbing setup:
Circle opening on removable back for drain pipe exit

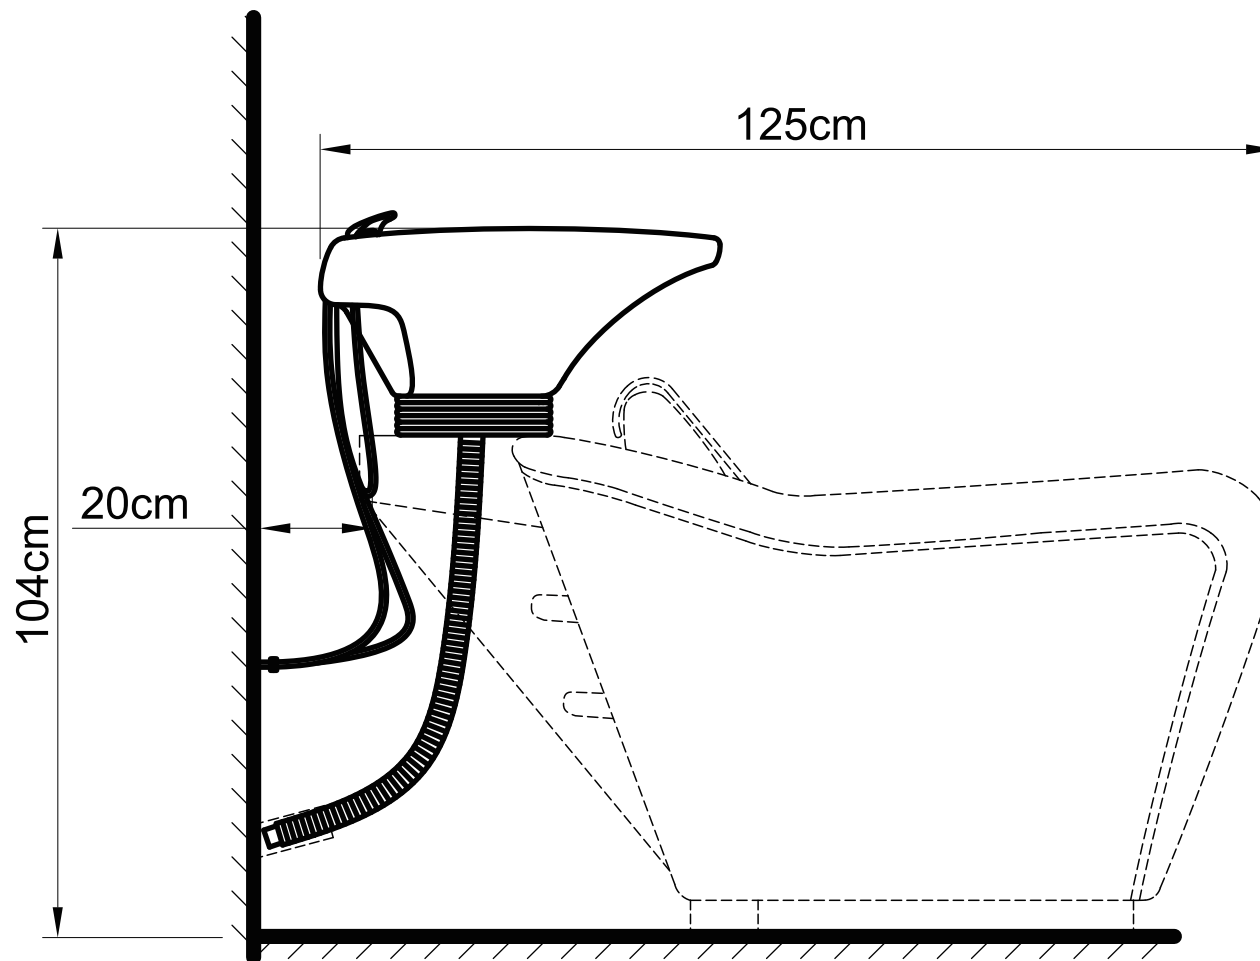


PLUMBING INSTRUCTIONS

Floor Plumbing

Floor plumbing setup:


All connection pipes are enclosed within the base unit.

Water supply lines are routed into the unit via circle opening on the back of the base.

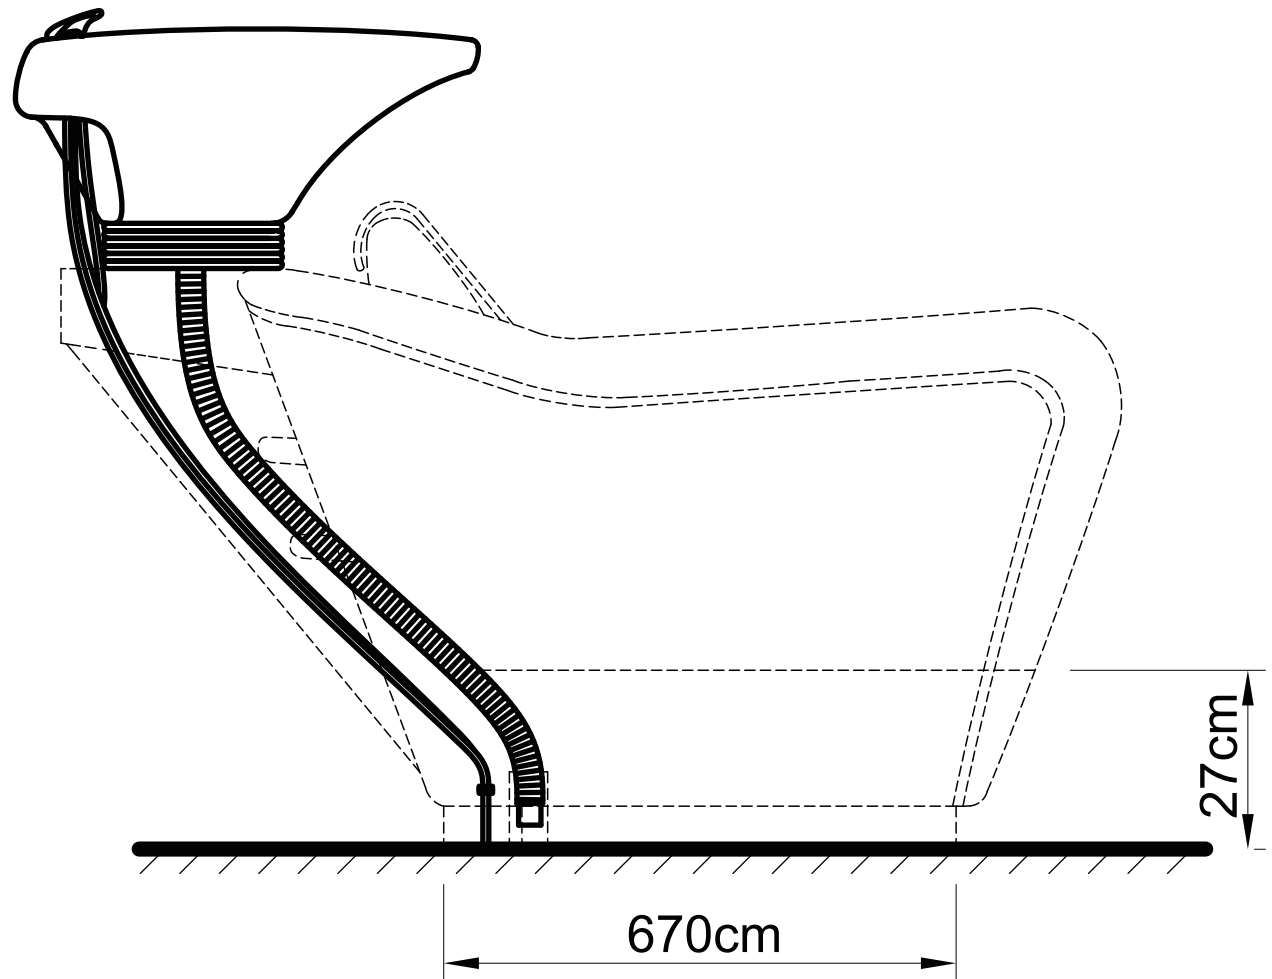

FLOOR ANCHOR INSTRUCTIONS


Secure the backwash on the floor by the provided floor anchors.

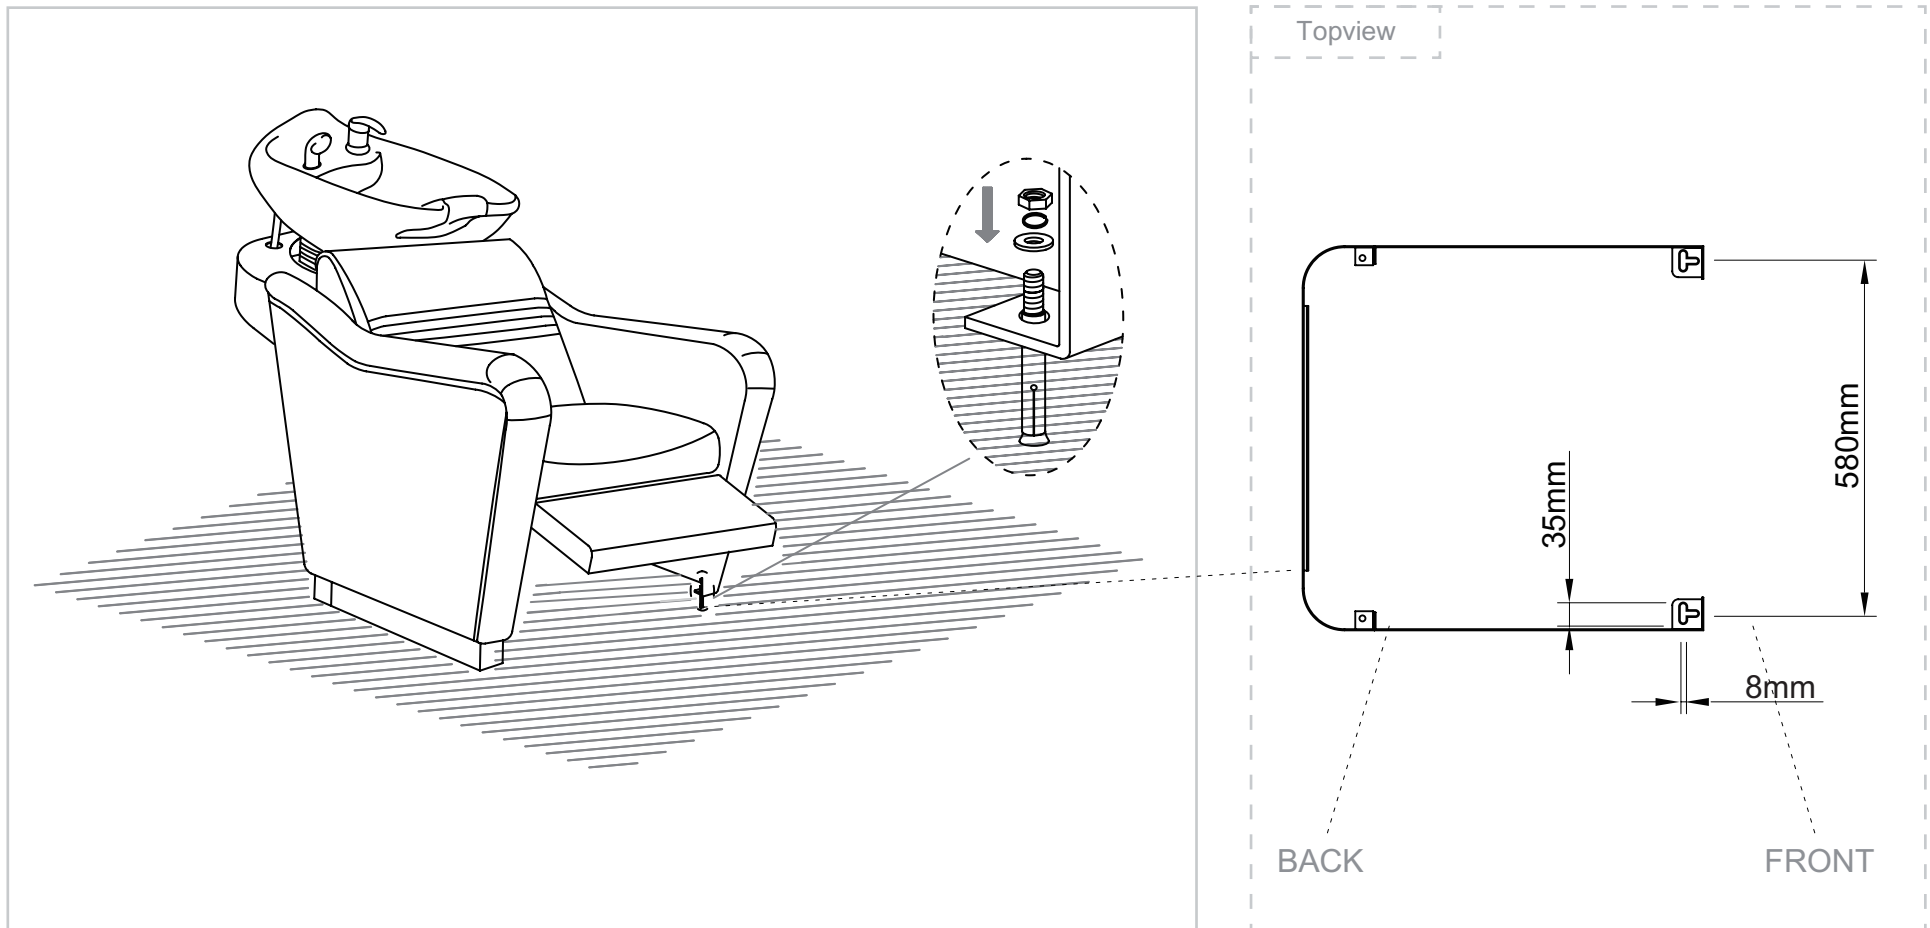

ASSEMBLY INSTRUCTIONS

Control Panel

Control Panel

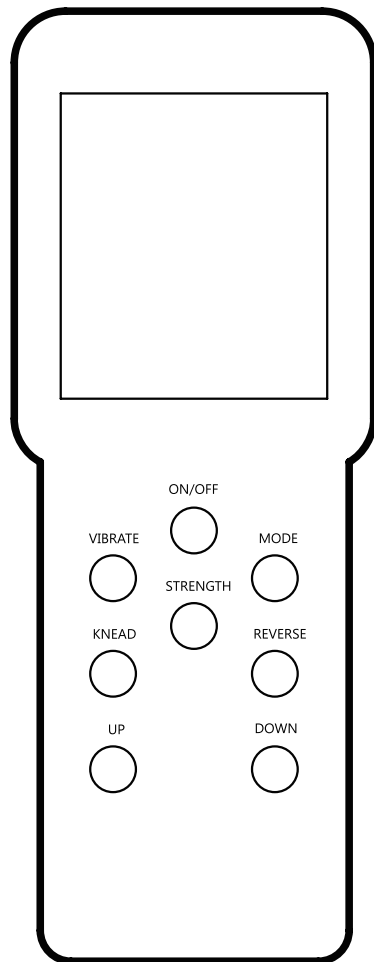

ON/OFF — to start or stop massage function of the backwash.

VIBRATE — to start or stop vibrate function.

STRENGTH — adjust the vibrate strength.

MODE — adjust the vibrate mode.


KNEAD — to start or stop knead function.

REVERSE — reverse run knead function.


UP — Press the button to raise the legrest of the backwash .

DOWN — Press the button to lower the legrest of the backwash .


ASSEMBLY COMPLETE

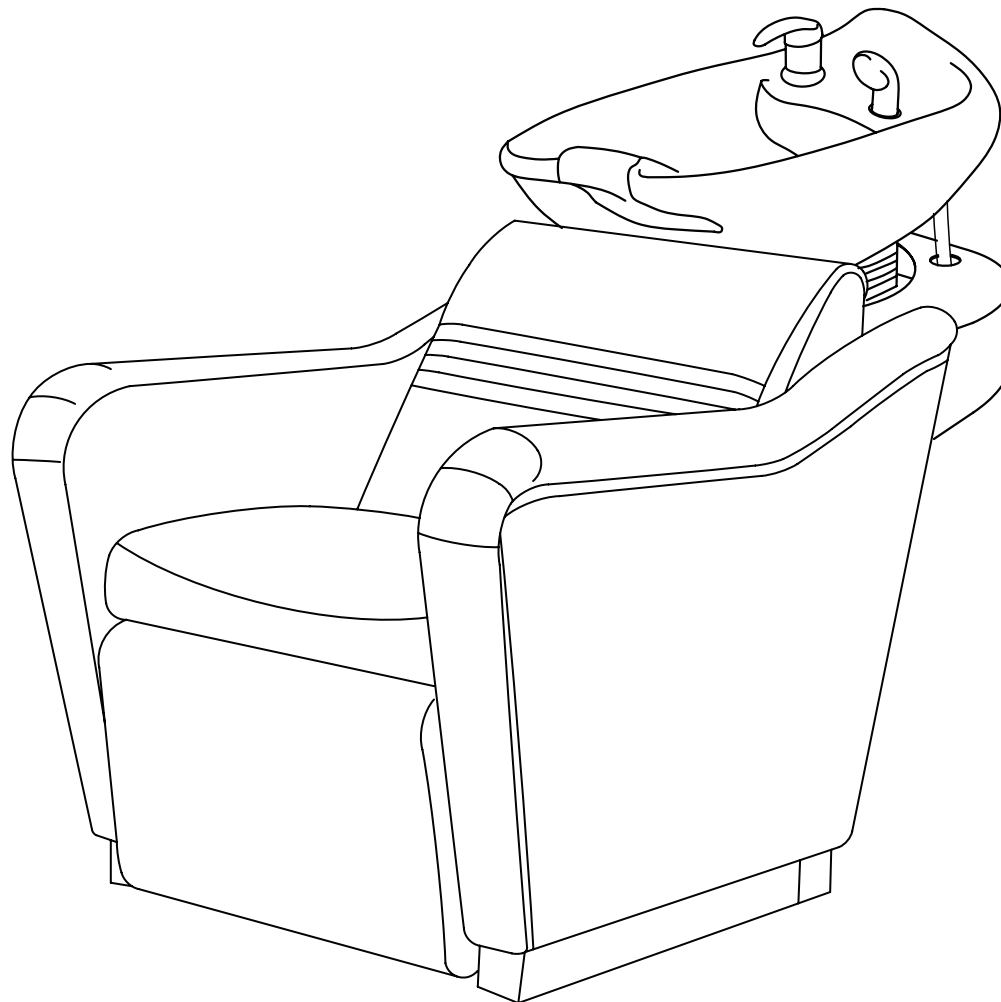


AFTERCARE INSTRUCTIONS




Brush away excess hair

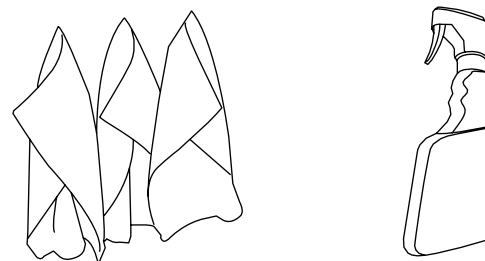

Wipe clean with a cloth dampened in a mild leather cleaner or wipe dry with a clean cloth

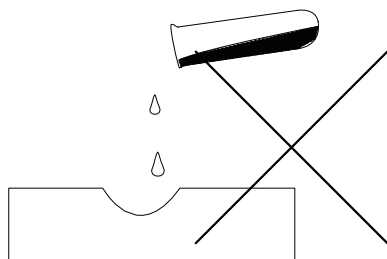

Avoid the use of abrasives, bleaches or solvents



Never remove and wash leather covers

After an initial period of use, check all fastenings for any loosened screws etc. If found, please tightened appropriately