
# **FUTURA ROLLERBALL DRYER**



# **CONTROL PANEL**

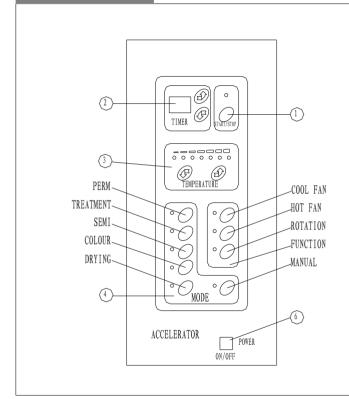

# (1) START / STOP

# (2) TIMER

Push to adjust time in one minute increments.

## (3) TEMPERATURE

Push to adjust temperature.

## (4) MODE


Options include: Perm, Treatment, Semi-Permanent Colour, Colour, Drying, Manual.

# (5) FUNCTION

## (6) POWER

Please turn to the OFF position when not in use.

# **USAGE**



# **PROGRAMMED SETTINGS**

MODE	APPLICATION	TEMPERATURE	TIME (minutes)	FAN	HEATER	ROTATION	COOLING
PERM	For perming	3	7	off	off	on	on
TREATMENT	For conditioning treatments	3	10	off	off	on	on
SEMI- PERMANENT COLOUR	For semi- permanent colour	4	10	off	off	on	on
COLOUR	For permanent colour	5	10	off	off	on	on
DRYING	For drying natural hair	6	15	on	on	on	on
MANUAL	User sets mode	3	10	on	on	on	off

In all modes, the operator can adjust each setting according to their preferences.

#### **OPERATING INSTRUCTIONS**

- 1. Adjust the dryer into position (refer to the diagram in the USAGE section).
- 2. Turn the POWER switch to the ON position.
- 3. Select a MODE.
- 4. Adjust TEMPERATURE and TIMER if required.
- 5. Push START/STOP to commence treatment.
- 6. During operation changes can be made to the settings (but not to the MODE).
- 7. To interrupt operation push START/STOP.
- 8. At the end of the program, an electronic alarm will sound. The nape fan will activate for two minutes, after which the alarm will sound again.
- 9. Please turn off POWER at the end of the operation.


#### **SAFETY & MAINTENANCE**

# Safety

- 1. DO NOT wet the accelerator. Dry your hands before touching the key pad.
- 2. DO NOT stop the accelerator head with your hands UNLESS it is an EMERGENCY.
- 3. DO NOT move or lift the unit using the head, as this may damage the unit.


## Maintenance

- 1. Use dry and soft cloth to clean plastics, plated, and painted surfaces.
- 2. Use only mild neutral detergent to remove stubborn stains and dirt.




## **INSTALLATION & ASSEMBLY**


1. Assemble the stand.



3. Install dryer head on the stand.



2. Insert the glide tube into dryer head.



**WARNING** – Do NOT install glide tube in stand pipe without the dryer head. The glide tube may pop out resulting in injury.

