
Miami

Styling Station with Storage

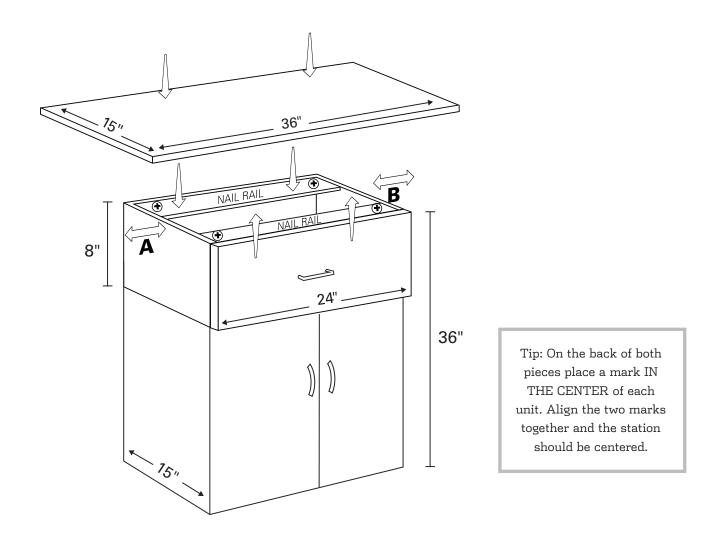

Assembly Instructions:

- 1. Pull top drawer completely out of the base cabinet and open the doors to access the interior.
- 2. Using a 3/16" drill bit, pre-drill 4 holes in the nail rail as pictured.
- Center the station topper to the base cabinet by measuring the distance from BOTH sides {A=B}. Please also position topper FLUSH with rear side of base cabinet.
- 4. To attach the topper to the base cabinet drill (4) 1.25" screws (provided) from inside the cabinet up through the nail rail and into the topper through the holes pre-drilled in step 2. Only use the provided 1.25" screws as screws that are too long will not allow the drawer to operate properly and/or may damage the topper.
- 5. Replace drawer.
- 6. Using the shelf pins (provided), insert shelf at desired position inside the base cabinet.